


# TALON R/C

REMOTE CONTROL



## MODELS:

2844VGE 28hp, 44" Deck

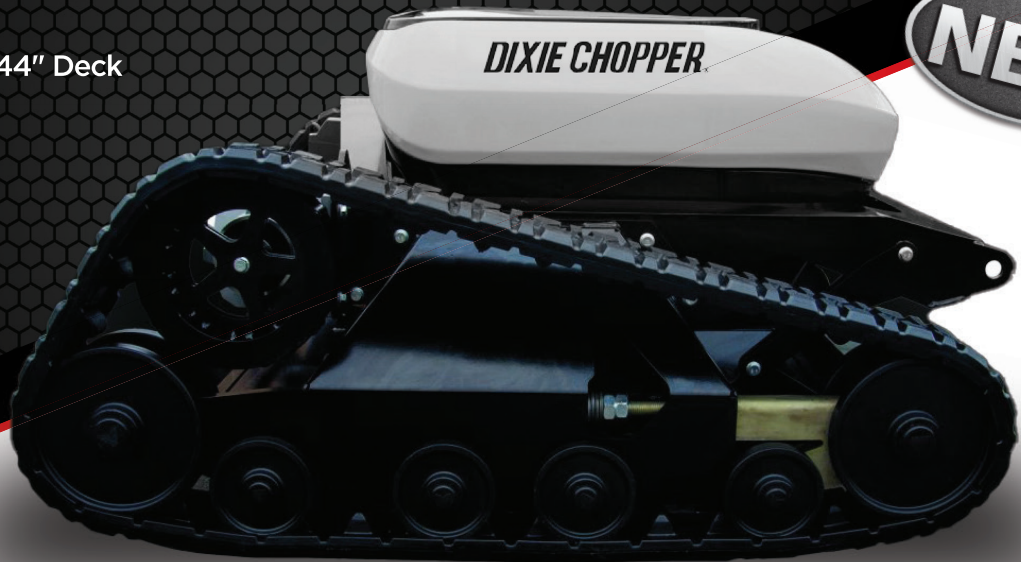


**NEW**

Talon R/C 2844VGE shown\*

## MOW WHERE NO MOWER HAS MOWED BEFORE.

The **Talon R/C** is the safest and most productive solution for commercial and municipal operators who need to maintain steep hills, ditches, wet terrains, and areas zero-turn mowers struggle to perform.


- **Remote Control** - Keep operators safe in areas needing maintained with remote control technology with nearly 500 feet of range.
- **American Muscle** - Powered by a 28 horsepower Vanguard® EFI engine, the Talon R/C has plenty of power to cut, climb, and maneuver any terrain.
- **Hillside Ready** - Mow up, down, and side to side on any slopes up to 55 degrees in areas where operators should never be operating equipment.
- **Hybrid Technology** - Electric drive system for advanced operator controls and variable speed.
- **Low Ground Pressure** - Maximize your efficiency while minimizing your footprint.
- **Variable Cutting Height** - Choose your cutting height from just one 1" all the way to 6" to get the perfect cut at every job.

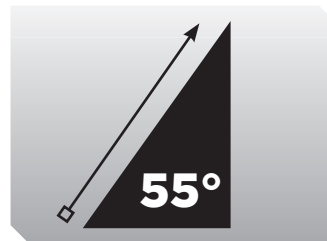


**Safe for Slopes** - Safely mow slopes up to 55 degrees with ease




**EFI Engine** - Improved fuel economy and easier cold starts

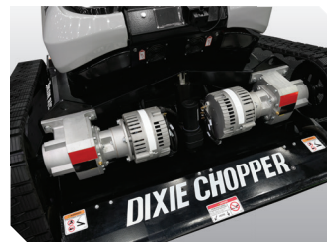

**Hybrid Power** - Electric drive system for smooth control

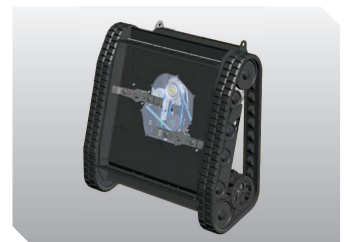


**Mulching Deck** - Twin spindle design for attractive finish in all grass types.

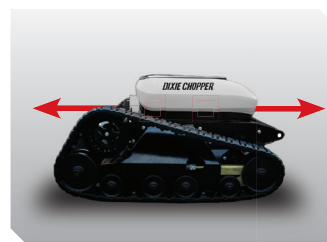

**Bi-Directional Cutting** - Improves efficiency by reducing turning



\*1 year or 1,500 hour limited warranty, see dealer for complete details

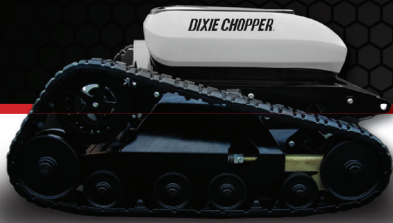

# TALON R/C



## 44" Deck

<b>Model</b>	<b>2844VGE</b>
<b>Engine</b>	
<b>Manufacturer</b>	Vanugard® w/ Oil Guard System
<b>Horsepower</b>	28
<b>Displacement</b>	810cc (EFI)
<b>Air-cleaner</b>	4 stage & Turbinator® Pre-Cleaner
<b>Cooling</b>	Air-cooled
<b>Starter</b>	Electric
<b>Fuel capacity</b>	2 gallons
<b>Maximum noise levels</b>	98 db(A)
<b>Engine warranty</b>	3-Year

<b>Drive System</b>	
<b>Drive motors</b>	48V AC electric motor to final reduction
<b>Ground speed</b>	5 mph

<b>Mower Deck</b>	
<b>Deck size</b>	44"
<b>Discharge</b>	Rear
<b>Cutting height</b>	1" - 6"
<b>Programmable low height setting</b>	Standard
<b>Bi-directional cutting</b>	Standard
<b>High Lift mulching blades</b>	Standard
<b>Deck Engagement</b>	Ogura® 250 ft-lbs
<b>Blade tip speed (approximate)</b>	18,044 fpm
<b>Fast-stop rotors</b>	Standard (3 seconds)

<b>Tracks</b>	
<b>Universal rubber</b>	Standard
<b>Maximum working angle</b>	55 degrees
<b>Track length</b>	39.4"

<b>Remote Controls</b>	
<b>Working range</b>	492 feet
<b>Frequency</b>	434 Mhz
<b>Battery</b>	2 rechargeable batteries
<b>Proportional joysticks</b>	Standard

<b>Dimensions</b>	
<b>Overall height (deck at lowest height)</b>	30.1"
<b>Overall height (deck at highest height)</b>	36"
<b>Overall width</b>	59"
<b>Overall length (without attachment)</b>	59.5"
<b>Weight</b>	1058 lbs